

# LUXSCI MARKETER

## API Functions



 **LUXSCI**<sup>®</sup>  
[www.luxsci.com](http://www.luxsci.com)



# TABLE OF CONTENTS

<b>OVERVIEW</b> .....	<b>3</b>	View Contacts .....	10
Linking the API to your Secure Marketing		View Contact by ID .....	13
Login(s) .....	3	Edit Contact by ID .....	14
<b>List Management API Requests</b> .....	<b>3</b>	Edit Contact by Email Address .....	16
Add New Contact List .....	3	Delete Contact By ID .....	17
Get Contact List(s) Details .....	4	Mark Contact as Unsubscribed .....	18
Update Contact List .....	7	<b>Campaign API Requests</b> .....	<b>19</b>
Delete Contact List.....	8	Get Campaigns .....	19
<b>Contact Management API Requests</b> .....	<b>9</b>	Add a New Campaign.....	22
Add New Contact .....	9	Update a Campaign .....	23

## OVERVIEW

The LuxSci Secure Marketing API is a subset of the LuxSci Account API with commands specifically for the LuxSci Secure Marketing system. Secure Marketing API commands are “account” scope. This document assumes that you are familiar with how the LuxSci API works in general (see the document LuxSci API v2 Mechanics) and how account scope works (see the document LuxSci API v2 Account Functions).

The API functions described herein allow your API client to programmatically access, insert, add, update and delete resources effectively within LuxSci Secure Marketing platform. This means you can perform functions programmatically on specific contacts, contact lists, and statistics automatically from third-party applications or custom code.

### Linking the API to your Secure Marketing Login(s)

In order to use the LuxSci Secure Marketing API commands, you need to link your API configuration to a specific user in the Secure Marketing interface. The API commands will then operate through that user on that user’s data and with that user’s level of access to the system.


To do this, you will login to your dedicated Secure Marketing interface as the user in question. Use the Settings – API Key menu and Generate a new API credential.

If you want to restrict access to your Secure Marketing API instance’s API, please contact LuxSci support for what IP addresses are appropriate for your installation. Restrictions would be to LuxSci internal servers and your dedicated servers, not your public API client IPs. The latter can be restricted in the regular LuxSci API v2 configuration area.

Copy the “API Token” from here and paste it into your LuxSci API v2 configuration page at the “**Secure Marketing Interface API Key**” prompt. If this API Token is changed or deleted, or if this Secure Marketing login is removed, your LuxSci API v2 Secure Marketing commands will fail until you reset the connection to a valid Marketing user. If you need to execute API commands against different Secure Marketing users, *you will need to create different LuxSci API v2 configurations* – one for each such user..


### Step 1:

In the menu, click on “Settings” then “API Key”:

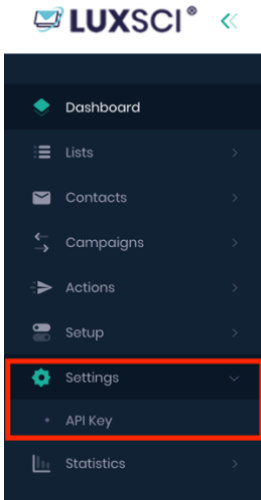


### Step 2:

Click “Generate New API Credential”:

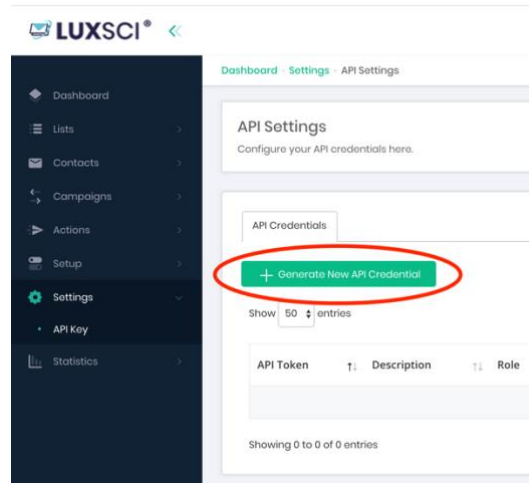


### Step 3:

Enter name, description:

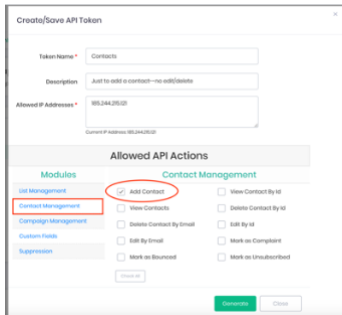

### Step 4:

Click “Generate” and get your key:

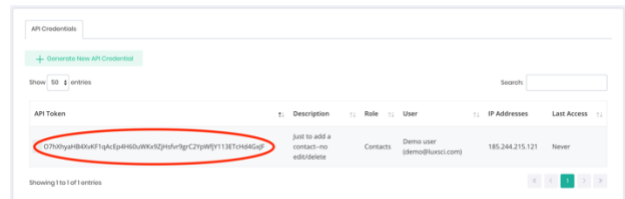

# List Management API Requests

## Add New Contact List

<b>Request Method</b>	POST
<b>Access Required</b>	Marketing - List Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/addList
<b>Request Query String</b>	none
<b>Request Body</b>	See below
<b>Response</b>	See below

### Request Body

Parameter	Data Type	Required	Description
<b>list_name</b>	string	<b>Yes</b>	Name of the contact list you're adding.
<b>owner_name</b>	string	<b>Yes</b>	From name for email sent with this contact list
<b>owner_email</b>	string	<b>Yes</b>	From email for email messages sent with this contact list
<b>reply_email</b>	string	<b>Yes</b>	The email where you should get replies
<b>bounce_email</b>	string	<b>Yes</b>	<b>This must be set to: smbncs@luxsci.com</b>
<b>group_name</b>	string	No	Add this list to a group
<b>additional_field</b>	string	No	Assign additional fields to this list. The field name "response" is reserved, so don't use that!  <i>Option not currently support. Additional fields support in development.</i>

## Response

Parameter	Data Type	Description
<b>id</b>	integer	New list ID.
<b><i>other fields</i></b>	Various	Matching those sent in the request or which you would normally get from contact list queries. See the <code>getLists</code> command, below.

### Example (cookies omitted)

POST <https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/addList>  
Content-Type: application/json

```
{"reply_email":"support+reply@luxsci.com","list_name":"TEST_LIST_1591809030","owner_email":"support@secured-message.com","owner_name":"LUXAPITEST"}
```

HTTP/1.1 200 OK  
Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"custom_fields":[],"bounce_email_id":1,"import_cancel":0,"copying":0,"reply_email":"support+reply@luxsci.com","name":"TEST_LIST_1591809030","owner_email":"support@secured-message.com","created_at":"2020-06-10 17:10:30","group_id":15,"updated_at":"2020-06-10 17:10:30","id":20,"user_id":3,"owner_name":"LUXAPITEST"}}
```

## Get Contact List(s) Details

Return details about one or more specific Contact List(s). If you omit all parameters, all lists should be returned.

<b>Request Method</b>	GET
<b>Access Required</b>	Marketing - List Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/getLists
<b>Request Query String</b>	See below
<b>Request Body</b>	None
<b>Response</b>	See below

## Request Body

Parameter	Data Type	Required	Description
<b>list_id</b>	int	No	List id for the specific contact list you want details for.
<b>group_id</b>	Int	No	Group id for all getting lists in a specific group.

## Response

This will return a list of associated arrays each containing standard list details.

Parameter	Data Type	Description
<b>id</b>	integer	List ID.
<b>name</b>	string	List Name
<b>owner_name</b>	String	From address for messages sent using this list
<b>owner_email</b>	String	From email for messages sent using this list
<b>reply_email</b>	String	Reply-To email for messages sent using this list
<b>user_id</b>	Int	ID of the user who owns this list
<b>group_id</b>	Int	ID of the group in which this list resides
<b>total_subscribers</b>	Int	Number of subscribers in the list
<b>bounce_id</b>	Int	
<b>bounce_email</b>	String	Email address to which bounces should be sent.
<b>custom_fields</b>	Hash	Hash of additional custom field information.



		The field name "response" is reserved, so don't use that!  This can be undefined/null if there are none.
<b>created_at</b>	DATETIME	When the list was created, in GMT
<b>updated_at</b>	DATETIME	When the list was updated, in GMT

### Example (cookies omitted)

POST https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/addList  
Content-Type: application/json

```
{"reply_email":"support+reply@luxsci.com","list_name":"TEST_LIST_1591809030","owner_email":"support@secured-message.com","owner_name":"LUXAPITEST"}
```

HTTP/1.1 200 OK  
Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"custom_fields":[],"bounce_email_id":1,"import_cancel":0,"copying":0,"reply_email":"support+reply@luxsci.com","name":"TEST_LIST_1591809030","owner_email":"support@secured-message.com","created_at":"2020-06-10 17:10:30","group_id":15,"updated_at":"2020-06-10 17:10:30","id":20,"user_id":3,"owner_name":"LUXAPITEST"}}
```

## Update Contact List

Update different information for existing Contact Lists such as From Name or From Address or assign custom fields. Return contact information and other general metadata for the user.

<b>Request Method</b>	PUT
<b>Access Required</b>	Marketing - List Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/updateList/{id}
<b>Request Query String</b>	None
<b>Request Body</b>	See below
<b>Response</b>	Same as for addList

### Request Body

Parameter	Data Type	Required	Description
<b>list_name</b>	string	No	Update contact list name
<b>group_name</b>	string	No	Update contact list group
<b>owner_name</b>	string	No	Update owner name
<b>owner_email</b>	string	No	Update owner email address
<b>reply_email</b>	string	No	Update reply email address
<b>additional_field</b>	string	No	Re-assign the value of a custom fields. If omitted then no change will apply to the pre-assigned custom fields  <i>Option not currently support. Additional fields support in development.</i>

### Example (Cookies Omitted)

PUT <https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/updateList/24>

Content-Type: application/json

```
{"reply_email":"support+reply-new@luxsci.com"}
```

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"bounce_email_id":1,"import_cancel":0,"import_status":0,"owner_email":"support@secured-message.com","created_at":"2020-06-10 18:00:30","total_subscribers":null,"is_deleted":0,"id":24,"owner_name":"LUXAPITEST","validate":0,"download_status":0,"custom_fields":[],"name":"TEST_LIST_1591812029","reply_email":"support+reply-new@luxsci.com","copying":0,"export_status":0,"group_id":15,"updated_at":"2020-06-10 18:00:31","user_id":3}}
```

## Delete Contact List

Note: deleting a contact list will delete any contacts in that list.

<b>Request Method</b>	DELETE
<b>Access Required</b>	Marketing - List Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/deleteList/{id}
<b>Request Query String</b>	none
<b>Request Body</b>	none

### Example (Cookies Omitted)

```
DELETE https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/deleteList/25
```

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1}
```

# Contact Management API Requests

## Add New Contact

<b>Request Method</b>	POST
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/addContact
<b>Request Query String</b>	none
<b>Request Body</b>	see below
<b>Response</b>	The same as you would get from getContact, described below.

### Request Body

Parameter	Type	Required	Description
<b>email</b>	string	Yes	Email address of the contact
<b>list_id</b>	int	Yes	ID of the contact list where this contact will be added
<b>format</b>	TEXT, HTML (default: HTML)	No	Which format this contact should receive the email  HTML = Will receive HTML version of the email TEXT = Will receive simple text version
<b>is_confirmed</b>	0, 1 (default: 1)	No	Confirmation status of the contact  0 = Add this contact as unconfirmed 1 = Add this contact as confirmed
<b>is_active</b>	0, 1 (default: 1)	No	Status of the contact  0 = Mark as inactive (will not receive emails) 1 = Mark as active
<b>bounced</b>	0, 1, 2 (default: 0)	No	Bounced status of the contact 0 = Add as not bounced 1 = Add as soft bounced

			2 = Add as hard bounced
<b>is_unsubscribed</b>	0, 1 (default: 0)	No	Subscription status of the contact  0 = Mark as subscribed 1 = Mark as unsubscribed
<b>is_spam</b>	0, 1 (default: 0)	No	If this contact has produced a spam complaint  0 = Mark as not spammed 1 = Mark spammed
<b>additional_field</b>	string	No	Set additional custom field values. The field "response" is reserved.

### Example (Cookies Omitted)

POST https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/addContact

Content-Type: application/json

```
{"email":"support@luxsci.com","customer_id_custom_field":999,"list_id":"28"}
```

HTTP/1.1 200 OK

```
{"auth":"OMITTED","success":1,"data":{"is_spamed":0,"import_id":null,"additional_fields_data":{"customer_id_custom_field":999},"is_verified":0,"email":"support@luxsci.com","created_at":"2020-06-10 18:38:26","id":19,"list_id":28,"never_sent":null,"bounced":"no_process","image":null,"is_unsubscribed":0,"is_active":1,"format":"html","updated_at":"2020-06-10 18:38:26","is_confirmed":1,"user_id":3}}
```

## View Contacts

This call permits you to get your contacts' data from the system by specific list or in aggregate. None of the request body parameters are required, and if you leave them blank, the call will return all contacts' data from all your lists.

<b>Request Method</b>	GET
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/getContacts

<b>Request Query String</b>	See below
<b>Request Body</b>	none
<b>Success Response</b>	See below

## Request Query String

The Request query string can contain any or all of the following keywords parameters to refine the search. If all are omitted, the report will include information about all contacts.

Parameter	Data Type	Required	Description
<b>list_id</b>	int	No	Contact list id for the contacts you want to get.
<b>limit_start</b>	int (default: 0)	No	Starting row of result. Default: 0
<b>limit_count</b>	int (default: 25)	No	Number of records to get. Default: 25

## Response Fields

Parameter	Data Type	Description
<b>list_id</b>	int	Contact list id the contact is in
<b>user_id</b>	Int	ID of the user owning this contact.
<b>id</b>	Int	The unique contact ID.
<b>email</b>	String	Contact email address
<b>is_active</b>	Boolean	Status of the contact  0 = Mark as inactive (will not receive emails) 1 = Mark as active

<b>is_verified</b>	Boolean	
<b>is_confirmed</b>	Boolean	Confirmation status of the contact  0 = Make this contact unconfirmed 1 = MAke this contact confirmed
<b>is_unsubscribed</b>	Boolean	Subscription status of the contact  0 = Mark as subscribed 1 = Mark as unsubscribed
<b>is_spammed</b>	Boolean	If this contact has produced a spam complaint  0 = Mark as not spammed 1 = Mark as spammed
<b>format</b>	Enum	Preferred email format: text or html
<b>updated_at</b>	DATETIME	Last update to this contact in GMT
<b>created_at</b>	DATETIME	Creation of this contact In GMT

### Example (Cookies Omitted)

GET https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/getContacts?list\_id=29

HTTP/1.1 200 OK

```
{"auth":"OMITTED","success":1,"data":[{"is_spamed":0,"bounced":"no_process","is_verified":0,"email":"support@luxsci.com","is_unsubscribed":0,"created_at":"2020-06-10 18:59:27","format":"html","is_active":1,"updated_at":"2020-06-10 18:59:27","user_id":3,"id":20,"list_id":29,"is_confirmed":1}]}
```

## View Contact by ID

This function allows you to get the details for specific contact using his/her contact ID.

<b>Request Method</b>	GET
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/getContact/{id}
<b>Request Query String</b>	none
<b>Request Body</b>	none
<b>Success Response</b>	Same as getContacts

### Example (Cookies Omitted)

GET https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/getContact/20

HTTP/1.1 200 OK

```
{"auth":"OMITTED","success":1,"data":[{"is_spamed":0,"bounced":"no_process","is_verified":0,"email":"support@luxsci.com","is_unsubscribed":0,"created_at":"2020-06-10 18:59:27","format":"html","is_active":1,"updated_at":"2020-06-10 18:59:27","user_id":3,"id":20,"list_id":29,"is_confirmed":1}]}
```



## Edit Contact by ID

Update the details, including custom field values, of a contact, using their contact ID.

<b>Request Method</b>	PUT
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/updateContact/{id}
<b>Request Query String</b>	None
<b>Request Body</b>	See below
<b>Success Response</b>	None

### Request Body

Parameter	Type	Required	Description
<b>email</b>	string	No	Change email address of the contact
<b>format</b>	TEXT, HTML (default: HTML)	No	Which format this contact should receive the email  HTML = Will receive HTML version of the email TEXT = Will receive simple text version
<b>is_confirmed</b>	0, 1 (default: 1)	No	Confirmation status of the contact  0 = Add this contact as unconfirmed 1 = Add this contact as confirmed
<b>is_active</b>	0, 1 (default: 1)	No	Status of the contact  0 = Mark as inactive (will not receive emails) 1 = Mark as active
<b>bounced</b>	0, 1, 2 (default: 0)	No	Bounced status of the contact  0 = Add as not bounced

			1 = Add as soft bounced 2 = Add as hard bounced
<b>is_unsubscribed</b>	0, 1 (default: 0)	No	Subscription status of the contact  0 = Mark as subscribed 1 = Mark as unsubscribed
<b>is_spam</b>	0, 1 (default: 0)	No	If this contact has produced a spam complaint  0 = Mark as spam 1 = Don't mark as spam
<b>additional_field</b> (e.g. custom fields)	string	No	Add or update details to additional fields.  <i>Note that you cannot currently update only custom fields in 1 API call – at least one “normal” field must also be included.</i>

**Example** (for contact with ID = 432822)

PUT <https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/updateContact/24>

Content-Type: application/json

```
{"customer_id_custom_field":888, is_active => 1}
```

HTTP/1.1 200 OK

```
{"auth":"OMITTED","success":1,"data":{"is_spamed":0,"import_id":null,"additional_fields_data":{"customer_id_custom_field":888},"is_verified":0,"email":"support@luxsci.com","created_at":"2020-06-10 19:26:47","id":24,"list_id":33,"never_sent":null,"bounced":"no_process","image":null,"is_unsubscribed":0,"is_active":1,"format":"html","updated_at":"2020-06-10 19:26:47","is_confirmed":1,"user_id":3}}
```

## Edit Contact by Email Address

Update the details, including custom field values, of contacts with the specified email address.

<b>Request Method</b>	PUT
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/updateContact/{email}
<b>Request Query String</b>	None
<b>Request Body</b>	Same as updateContact; Plus the below
<b>Success Response</b>	None

### Request Body

Parameter	Type	Required	Description
<b>list_id</b>	Integer	No	Only match contacts with this email address in this list.  <i>If you leave the "list_id" parameter blank, then this call will update ALL instances of this email address across ALL of your Contact Lists.</i>
<b>Other fields</b>	Vary	No	Like updateContact

### Example

PUT https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/updateContact/support@luxsci.com

Content-Type: application/json

```
{"customer_id_custom_field":777, is_active => 0}
```

HTTP/1.1 200 OK

```
{"auth":"OMITTED","success":1,"data":{"is_spamed":0,"import_id":null,"additional_fields_data":{"customer_id_custom_field":777},"is_verified":0,"email":"support@luxsci.com","created_at":"2020-06-10"}}
```

```
19:26:47", "id":24, "list_id":33, "never_sent":null, "bounced":"no_process", "image":null, "is_unsubscribed":0, "is_active":0, "format":"html", "updated_at":"2020-06-10 19:26:47", "is_confirmed":1, "user_id":3}}
```

## Delete Contact By ID

<b>Request Method</b>	DELETE
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/deleteContact/{id}
<b>Request Query String</b>	None
<b>Request Body</b>	None
<b>Success Response</b>	None

### Example (cookies omitted)

```
DELETE https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/deleteContact/27
```

```
HTTP/1.1 200 OK
```

```
Content-Type: application/json
```

```
{"auth":"OMITTED","success":1}
```

## Mark Contact as Unsubscribed

Changes a contact's status to "unsubscribed." This is more efficient than calling updateContact to make this change.

<b>Request Method</b>	PUT
<b>Access Required</b>	Marketing - Contact Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/ markAsUnsubscribed /{id}
<b>Request Query String</b>	None
<b>Request Body</b>	None
<b>Success Response</b>	None

### Example (cookies omitted)

PUT https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/markAsUnsubscribed/28

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1}
```

# Campaign API Requests

## Get Campaigns

This call allows you to retrieve details on your campaigns.

<b>Request Method</b>	GET
<b>Access Required</b>	Marketing - Campaign Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/marketing/getCampaigns
<b>Request Query String</b>	See below
<b>Request Body</b>	None

## Request Body

Parameter	Type	Required	Description
<b>id</b>	int	No	Use if you want to restrict details to specific Campaign id. If left blank, all your campaigns' details will be returned.
<b>group_id</b>	int	No	Group id of the campaigns you want to get.
<b>limit_start</b>	int (default: 0)	No	Starting row of result. Default: 0
<b>limit_count</b>	int (default: 25)	No	Number of records to get. Default: 25

## Response Body

The response is an array of associated arrays with the following keys:

Parameter	Type	Description
<b>id</b>	<b>Integer</b>	<b>Unique ID of this campaign</b>
<b>user_id</b>	<b>Integer</b>	<b>User ID of the person owning this campaign</b>
<b>group_id</b>	Integer	Group ID of the group in which this campaign lives.
<b>name</b>	string	Name your campaign
<b>subject</b>	string	Email subject of this campaign
<b>content_html</b>	string	HTML content for the campaign
<b>content_text</b>	string	TEXT version of the campaign
<b>created_at</b>	DATETIME	When this campaign was created, in GMT
<b>updated_at</b>	DATETIME	When this campaign was last updated, in GMT

## Example

GET <https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/getCampaigns?id=8>

Content-Type: application/json

```
{"content_text":"Hello World!","group_name":"TEST GROUP","broadcast_name":"LUXSCI TEST CAMPAIGN","content_html":"<h1>Hello World!</h1>","email_subject":"LUXSCI TEST CAMPAIGN"}
```

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"subject":"LUXSCI TEST CAMPAIGN","name":"LUXSCI TEST CAMPAIGN","content_text":"Hello World!","created_at":"2020-06-10 20:22:18","group_id":24,"updated_at":"2020-06-10 20:22:18","content_html":"<h1>Hello World!</h1>","id":8,"user_id":3}}
```



## Add a New Campaign

Create a new email broadcast campaign.

<b>Request Method</b>	POST
<b>Access Required</b>	Marketing - Campaign Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/marketing/addCampaign
<b>Request Query String</b>	None
<b>Request Body</b>	See Below
<b>Success Response</b>	Like getCampaigns

### Request Body

Parameter	Type	Required	Description
<b>group_name</b>	string	Yes	In which group do you want to sort this campaign
<b>broadcast_name</b>	string	Yes	Name your campaign
<b>email_subject</b>	string	Yes	Email subject of this campaign
<b>content_html</b>	string	Yes	HTML content for the campaign
<b>content_text</b>	string	Yes	TEXT version of the campaign

### Example (without cookies)

POST https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/addCampaign

Content-Type: application/json

```
{"content_text":"Hello World!","group_name":"TEST GROUP","broadcast_name":"LUXSCI TEST CAMPAIGN","content_html":"<h1>Hello World!</h1>","email_subject":"LUXSCI TEST CAMPAIGN"}
```

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"subject":"LUXSCI TEST CAMPAIGN","name":"LUXSCI TEST
```

```
CAMPAIGN", "content_text": "Hello World!", "created_at": "2020-06-10
20:22:18", "group_id": 24, "updated_at": "2020-06-10 20:22:18", "content_html": "<h1>Hello
World!</h1>", "id": 8, "user_id": 3}}
```

## Update a Campaign

<b>Request Method</b>	PUT
<b>Access Required</b>	Marketing - Campaign Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/marketing/updateCampaign/{id}
<b>Request Query String</b>	None
<b>Request Body</b>	See Below
<b>Success Response</b>	Like getCampaigns

## Request body

Parameter	Type	Required	Description
<b>group_name</b>	string	No	Re-sort broadcast into another group
<b>broadcast_name</b>	string	No	Update Campaign name
<b>email_subject</b>	string	No	Update email subject of the broadcast
<b>content_html</b>	string	No	Update HTML content for the broadcast
<b>content_text</b>	string	No	Update Text version of the broadcast

### Example (without cookies)

PUT <https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/updateCampaign/10>

Content-Type: application/json

```
{"email_subject":"LUXSCI TEST CAMPAIGN SUBJECT"}
```

HTTP/1.1 201 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1,"data":{"subject":"LUXSCI TEST CAMPAIGN SUBJECT","name":"LUXSCI TEST CAMPAIGN","content_text":"Hello World!","created_at":"2020-06-10 20:28:45","group_id":24,"updated_at":"2020-06-10 20:28:47","content_html":"<h1>Hello World!</h1>","id":10,"user_id":3}}
```

## Delete a Campaign

<b>Request Method</b>	DELETE
<b>Access Required</b>	Marketing - Campaign Management
<b>Request URL</b>	/perl/api/v2/account/[account id]/marketing/deleteCampaign/{id}
<b>Request Query String</b>	None
<b>Request Body</b>	None
<b>Success Response</b>	None

### Example (Cookies omitted)

DELETE https://example.secured-message.com/perl/api/v2/account/ACCOUNTID/marketing/deleteCampaign/11

HTTP/1.1 200 OK

Content-Type: application/json

```
{"auth":"OMITTED","success":1}
```



## Have Additional Questions? We're Happy to Help!

Call: +1 800-441-6612

Email: [sales@luxsci.com](mailto:sales@luxsci.com)

Web: [luxsci.com](http://luxsci.com)

## Solutions to Ensure Your Private Information Stays Private:

- Secure Email Marketing
- Secure High Volume Sending
- Secure Connector
- Secure Email Hosting
- Secure Web Hosting
- Secure Web & PDF Forms
- Secure Text

LuxSci is your trusted leader for secure email, data and communication solutions. LuxSci helps ensure that "what's private stays private." Find out why LuxSci is the go-to source by the nation's most influential institutions in healthcare, finance and government for comprehensive, flexible, and easy-to-use secure solutions.